

500X

Honda BigBike

— EXCITES THE WORLD —





New Adventure Design

Styling has a sharp adventure edge, and is complemented by long travel suspension, high-specification single-tube shock absorber, comfortable rider ergonomics.



Full LED Lighting

Full LED lighting system for optimal energy efficiency. Its design features of a centralized headlight help to improve weight saving in addition to providing a sharper visual.



500cc Engine & Assist / Slipper Clutch

Upgrades to the inlet, exhaust and valve timing, which added 4% more power and torque between 3-7,000rpm compared to the previous model, and were accompanied by an enhanced exhaust note and a new assist/slipper clutch.



Digital LCD Speedometer

Set in a multi-surfaced and textured surround, echoing the overall design theme – feature a Gear Position and Shift Up indicator.



Emergency Stop Signal




Emergency Stop Signal system detects sudden braking and automatically activates the front and rear hazard lights, which ash to warn any nearby vehicles.



Bigger Front Wheel

The 19-inch front wheel – along with the long travel suspension – ensures confident, supremely stable handling on rough surfaces.

500X

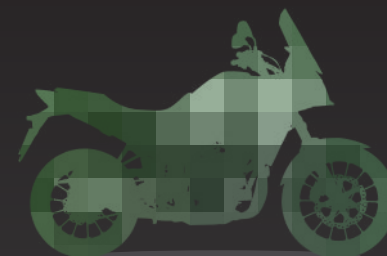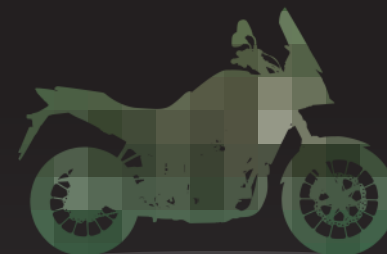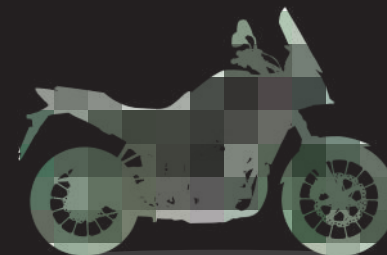

*Colours and photos may vary from the actual product.

SPECIFICATIONS

ENGINE AND FUEL SYSTEM

Engine Type	Liquid-cooled, 4 stroke, Parallel Twin DOHC
Displacement	471 cm ³
Bore x Stroke	67.0 mm x 66.8 mm
Compression Ratio	10.7 : 1
Max. Power	37 kW @ 8,600 rpm
Max. Torque	45 N.m @ 6,500 rpm
Engine Oil Capacity	3.2 ℓ
Fuel System	PGM-FI

TRANSMISSION

Clutch Type	Assist / Slipper Clutch, Manual Clutch Wet Multiplate Type
Transmission Type	6 Speed, Mechanical (Chain drive)

DIMENSION AND WEIGHT

Dimensions (L x W x H)	2,155 mm x 825 mm x 1,410 mm
Wheelbase	1,445 mm
Caster Angle	27.5°
Trail	108 mm
Seat Height	830 mm
Ground Clearance	180 mm
Kerb Weight	197 kg
Fuel Tank Capacity	17.7 ℓ

SUSPENSION

Suspension Type	Front: Conventional Telescopic, Pre-Load Adjustable
	Rear: Prolink Mono with 5 Stage Preload Adjuster, Steel Square Pipe Swingarm

WHEELS AND BRAKE

Rim Size	Front: 19M/C X MT 2.50
	Rear: 17M/C X MT 4.50
Tyres	Front: 110/80R-19M/C (59H) (Tubeless)
	Rear: 160/60R-17M/C (69H) (Tubeless)
Brakes Type	Front: Hydraulic Single Disc, ABS
	Rear: Hydraulic Single Disc, ABS

COLOUR VARIANT

	GRAND PRIX RED		MAT GUNPOWDER BLACK METALLIC
	PEARL METALLOID WHITE		

The destination for riders
Honda BigWing

Meet the various models of Honda BigBike And the world-class experience that can be yours at **Honda BigWing**, "The destination for riders."

All specifications are provisional and subject to change without notice.

- Please note that the figures provided are results obtained by Honda under standardised testing conditions prescribed by WMTC. Tests are conducted on a rolling road using a standard version of the vehicle with only one rider and no additional optional equipment. Actual fuel consumption may vary depending on how you ride, how you maintain your vehicle, weather, road conditions, tyre pressure, installation of accessories, cargo, rider and passenger weight, and other factors.
- These models come with a 2 year or 20,000km manufacturing warranty (whichever comes first).

Toll Free Line
1800 883993

Monday – Friday (9am – 5pm)
Close on public holidays
<https://hondabigbike.com.my>

Honda Motorcycle Malaysia
 [hondamotorcycle.my](https://www.instagram.com/hondamotorcycle.my)
 012-499 3991

AUTHORISED DEALER STAMP